

Rockfon® Artic®

Datasheet



Rockfon® Artic®

- Standard surface ideal for most common applications
- Good acoustic properties
- Basic range of dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: nuanced white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Education
- Retail


Edge detail	Module size (mm)	Approximate weight (kg/m²)	Recommended installation System
A15	600 x 600 x 15	2.0	Rockfon® System T15 A™
	1200 x 600 x 15	2.0	Rockfon® System T15 A™
A24	600 x 600 x 15	2.0	Chicago Metallic™ T24 1812
		2.0	Chicago Metallic™ T24 3220
	1200 x 600 x 15	2.0	Chicago Metallic™ T24 1812
		2.0	Chicago Metallic™ T24 3220
E15	600 x 600 x 15	2.2	Rockfon® System T15 E™
	1200 x 600 x 15	2.2	Rockfon® System T15 E™
E24	600 x 600 x 15	2.2	Chicago Metallic™ T24 3220
	1200 x 600 x 15	2.2	Chicago Metallic™ T24 3220



Performance



 $\begin{array}{l} \textbf{Sound absorption} \\ \alpha_{w} : 0.90 \text{ (Class A)} \end{array}$

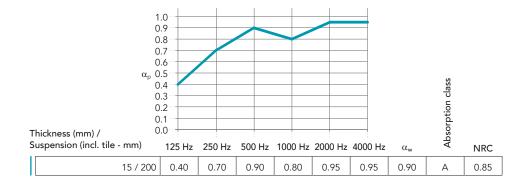



Reaction to fire

Α1



Light reflection

82%



Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity. There will always be some dust/dirt on the panels after some time, and with regular exposure to high humidity this could lead to fungi growth. Please avoid condensation on the panel C/0N



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Fully recyclable stone wool
The recycled content of Rockfon products is between
29% and 64% according to ISO 14021.
Rockfon acoustic solutions are Cradle to Cradle
Certified® Silver and Bronze (depending on product
type).



Carbon footprint

2.43 kg of CO2 eq. (cradle to gate based on EPD)



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Sounds Beautiful